

6A Series Panel

CG-6A6C



Chassis Features

Dimension (mm)	185(W) x 412(H) x 445(D) mm
Drive Bays	5.25" External x 4 3.5" External x 1, 3.5" Internal x 5
Expansion Slots	7
Mainboard	ATX/Micro ATX
Fan (mm)	Front : 120x120 x1 (Optional) or 90x90 x1 (Optional) or 140x140 x1 (Optional) Rear : 90x90 x1 (Optional) or 120x120 x1 (Optional) Side : 120x120 x2 (Optional) or 250x250 x1 (Optional)
Power Supply	PT/PH/PE/PG/PK Series

Specification



SGCC


Ø 90 / Ø 120 / Ø 140 mm
(Optional) 

Packing Information

	CUFT.	N.W.	G.W.	20FT	40FT	40HQ
CG-6A6C	2.49'	5.4	6.6	396	828	920

Chassis

CG-xx6C

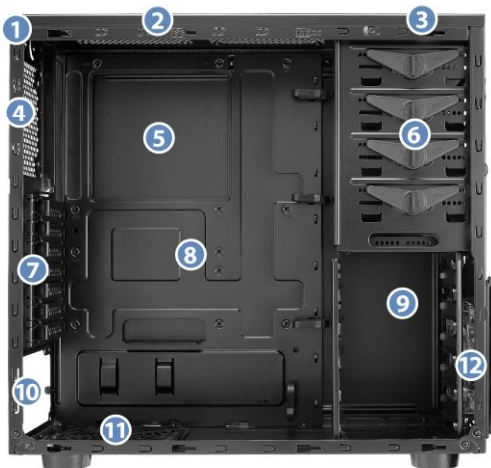

Support water-cooling pipe.



Top ventilation opening.



I/O module on the top of bezel—Users can more easily access to USB or AUDIO port.



Rear ventilation opening—Can assemble 9, 12cm fan.




Don't need to remove the motherboard off when changing CPU fan.



Screwless ODD—To assemble ODD easily.



Mesh PCI Slot—With better ventilation, can support screwless PCI device and easy to assemble.



Support 313mm VGA card.



Screwless HDD track—To assemble HDD easily.



PSU in the bottom—Keeps chassis not only steady, without shaking, but also provide better air flow for PSU.



PSU dust prevention net—To prevent dust from entering the case (Optional). Can assemble 9, 12, 14cm fan.



Front dust filter—To prevent dust from entering case (Optional). Can assemble 9, 12, 14cm fan.