


R2 Series Panel

CM-R227



Card Reader
(Optional)
AC-IE3221
AC-IF3221

■ - Standard
■ - Optional

CM-R227



CM-R227-01
(Black/Silver)

hair-line surface treatment



CM-R227-02
(Black)




CM-R227-03
(Black/Silver)

electroplating

Chassis Features

- Compatible with Micro-ATX mainboards
- All cases with folded edge
- Easy installation and maintenance
- Zinc plated steel
- Extra cooling fan holder (Optional)
- Screw secured manually (Optional)

Specification

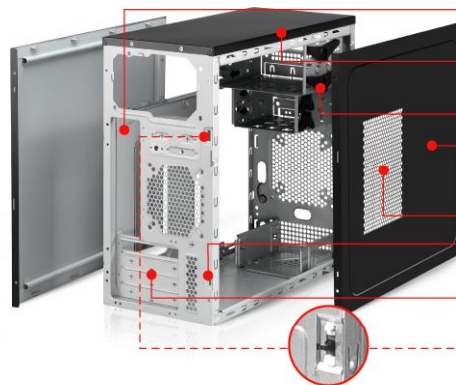

- Rear window EMI (CE) shield**
To enhance EMI (CE) effect
- Smooth edges**
To provide greater safety for users
- ODD/FDD screw-less parts**
- Textured design**
To provide better feel and ease to handle
- TAC 2.0 SIDE VENT**
- Kensington security slot**
For kensington security cable purpose
- Unique design**
To increase ventilation efficiency
- Intrusion Switch (Optional)**
To monitor the status of the chassis cover

Packing Information

	CUFT.	N.W.	G.W.	20FT	40FT	40HQ
CM-R227	1.51'	4.01	5.06	681	1431	1630

Chassis

CM-xx27


Dimension (mm)	360(H) x 180(W) x 375(D)
Drive Bays	5.25" External x 2 3.5" External x 2 3.5" Internal x 2
Expansion Slots	4
Mainboard	Micro ATX
Fan (mm)	Front : 80x80 x 1 or 90x90 x 1 or 120x120 x 1 (Optional) Rear : 80x80 x 1 or 90x90 x 1 (Optional)
Power Supply	PX/PL/PW/PK Series

Front View



Front Fan:
80x80 mm x 1 or 90x90 mm x 1 or
120x120 mm x 1
(Optional)

Side View



TAC 2.0 SIDE VENT

Back View



Rear Fan:
80x80 mm x 1 or
90x90 mm x 1
(Optional)

Ø80/90/120 mm
(Optional)

