

# LCD MONITOR

## LM-1630



<b>Model</b>	<b>LM-1630</b>
LCD Size	15.6" Wide TFT Active Matrix LCD Display
Light source	LED backlight
Active Area	344.2 (H) x 193.5 (V) mm
Pixel Pitch	0.252 (Typical) mm
Aspect Ratio	16 : 9
Brightness (nit)	220 cd/m <sup>2</sup> (Typical)
Contrast Ratio	500 : 1 (Typical)
Viewing angle (L / R; U / D)	45 (L) / 45 (R) ; 15 (U) / 35 (D)
Response Time (ms) ; at 25°C	8 ms (Typical)
Display Colors	262 K colors (Typical)
Maximum Resolution (pixels)	1366 x 768 HD (Typical)
Input Connector	D-sub / Power in
OSD	Multi-Language
Power Consumption (Active)	< 20 W
Power Consumption (Saving)	< 2 W
Power Type	Input 100~240 VAC 50 / 60 Hz Output DC 12V / 1.5A external adaptor
Dimension	379(W) x 293(H) x 35.5(D) mm
Weight	1.2 kg

Side View



Back View




### Packing Information

	CUFT.	Packing	N.W	G.W	20FT	40FT	40HQ
LM-1630	0.64'	1 Pcs/Ctn.	2.5	3.0	1590	3300	3780

### Features

#### Energy Efficient

The led backlighting technology, uses up to 33% less energy than previous equivalent-sized LCD monitors. Not only saving energy but also prolonging the monitor life.

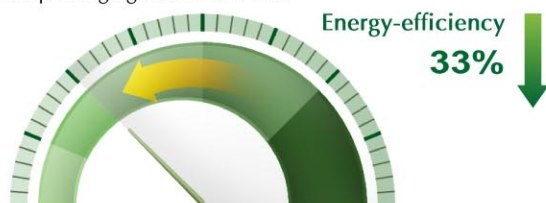

#### HD+

The highest resolution possible will give you amazingly sharp graphics, photos and motion videos.

